

## H5P Sort the Paragraphs Tool

H5P's **Sort the paragraphs** tool allows instructors to sort text and paragraphs.

An example of sorting paragraphs about morning routines can be found at

<https://h5p.org/content-types/sort-the-paragraphs>.




New to H5P development on Avenue? Read this → H5Ps are created in the course **Content Bank**. After you are satisfied with the H5P you have created, position the H5P on your main course. See the steps for this at <https://tinyurl.com/mryx369h>.

### Create a Sort the Paragraphs Activity

1. Click on the **Content bank** in the **Navigation drawer**.



2. In the **Content bank**, click on the **Add** button.



3. Locate the **Sort the Paragraphs** icon in the drop-down list.



The **Sort the Paragraphs** editing screen appears.

4. In the **Title** text box, type a title.

Sort the Paragraphs

Title \* Metadata

Used for searching, reports and copyright information

Changing a Lightbulb

5. Click on the **Media** drop down.



6. Choose which type of media (Image, Video, Audio)


**Note:** You can only have one kind of media for each activity.

This example is for an **Image**. To add an audio clip or a video, look at the end of this document.


7. Click on the **Add** button.



8. Choose the **image** from your device.

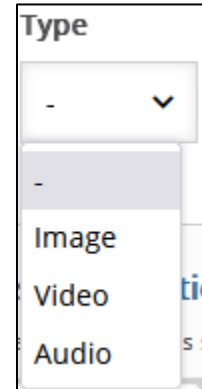

9. Click on the **Metadata** button.



10. Enter **copyright details**, similar to this example.

**Metadata (sharing and licencing info)**  
Fill in the fields below

Save metadata

Title \*

Glowing Lightbulb

Licence \*

Attribution (CC BY) ▼

Licence version

4.0 International ▼

Years (from)

2019

Years (to)

Source

ors.org/en/free-clipart/Glowing-light-bulb/83473.html

Author's name

Public Domain Vectors

Author's role \*

Licensee ▼

Save author

Licence extras

Any additional information about the licence

Public Domain Vectors

11. Click on the **Save metadata** button.
12. Add **Alternative text** for the image.
13. Type a **Task description** for this activity.

**Alternative text** \*

a hand holding a lightbulb

**Task description** \*

What your students should know.

**B** ***I*** **U** ~~**T<sub>x</sub>**~~ [List Icons] [Link Icon] [Unlink Icon] [Normal]

Drag the sentences into order to let the reader know how to change a lightbulb.

body p

14. Starting at the first **Paragraphs** option, type the first text item (letter, word, sentence paragraph) into the text field.

**Paragraphs** \*

Paragraph [X] [Up/Down Arrows]

Turn off the power to the light bulb.

15. Use this example list to add more items to the **Paragraphs** fields that follow.

**Note:** Do not type the list number.

1. Turn off the power to the light bulb. (**Note:** already added)
2. Allow the light bulb to cool.
3. Remove the old bulb.
4. Insert the replacement bulb.
5. Switch on the power.
6. Dispose of your old bulb.

**Note:** To add additional text items or **Paragraphs**, click on the **ADD PARAGRAPH** button.

**ADD PARAGRAPH**


16. Expand the **Behavioural Settings** section.

17. Choose the **Scoring mode**.

- **Correctly placed paragraph:** gives points for individually correctly placed paragraphs.
- **Correct sequence:** Give points if all of the paragraphs are in the correct order.

18. Click on the **Save** button.

**Note:** The activity should appear similar to this.



Drag the sentences into order to let the reader know how to change a lightbulb.

Turn off the power to the light bulb.	^	v
Allow the lightbulb to cool.	^	v
Remove the old bulb.	^	v
Dispose of the old bulb.	^	v
Switch on the power.	^	v
Insert the replacement bulb	^	v

☒ Check

## Add a video

1. Click on the **Media** drop down.


A dark grey button with a white right-pointing triangle and the word "Media" in white text.

2. Choose the **Media Type, Video**.


**Note:** You can only have one kind of media for each activity.

3. Type the **Title** of the Video.

4. Click on the **Video sources** icon.

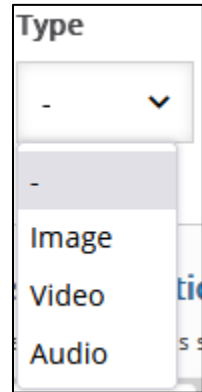

5. Upload your video file or paste the YouTube link or other **source** of the video into the textbox. (For example: <https://youtu.be/Xu7joRKKvrM>)

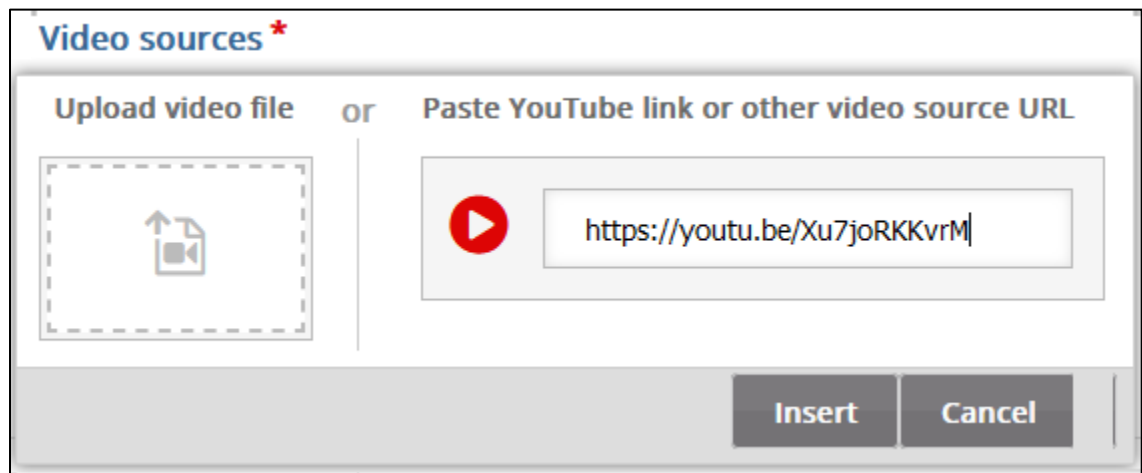



6. Click on the **Insert** button.

**Note:** An icon appears with the **video host's** name.




The **activity** should appear similar to this.

A woman with long dark hair, wearing a green hoodie with 'Yorke Peninsula South Australia' printed on it, is smiling and holding a compact fluorescent lightbulb (CFL) in her right hand. The background is a plain, light-colored wall. A play button icon is overlaid on the video frame.

Watch on  YouTube

Drag the sentences into order to let the reader know how to change a lightbulb.

Insert the replacement bulb.	⬆ ⬇ ⬇ ⬆
Remove the old bulb.	⬆ ⬇ ⬇ ⬆
Dispose of the old bulb.	⬆ ⬇ ⬇ ⬆
Switch on the power.	⬆ ⬇ ⬇ ⬆
Allow the lightbulb to cool.	⬆ ⬇ ⬇ ⬆
Turn off the power to the light bulb.	⬆ ⬇ ⬇ ⬆

 Check

## Add an Audio Clip


1. Click on the **Media** drop down.




2. Choose the **Type, Audio**.

**Note:** You can only have one kind of media for each activity.

3. Type the **Title** of the **Audio** clip.
4. Click on the **Source files** icon.

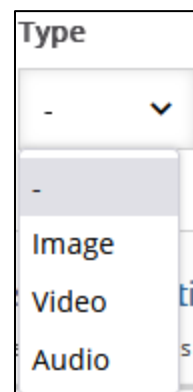

5. Click on the **Upload audio file** icon.

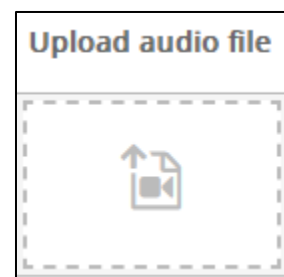

6. Locate the **audio (Mp3)** file on your device and select it.


7. Choose the **Player mode**,

- a. **Minimalistic** for a small icon



- b. **Full** for a controllable player

**Note:** Do not check **Enable Autoplay**. Check, **Enable Controls**.



- c. **Transparent** for no visible player or icon


**Note:** Try to avoid this, as it does not allow learners the ability to start or stop the audio.

**Note:** For this example, the following script was used.

These are the steps to safely change a lightbulb in your home. First, turn off the power to the light bulb. Then, allow the light bulb to cool for a few minutes. After that, remove the old bulb. Now, insert the replacement bulb. When the bulb is securely in the lamp or socket, switch on the power. Finally, please dispose of your old bulb following recycling rules.

The website, **TTSMP3** <https://ttsmp3.com> was used to generate the audio. It is preferable to record a human voice.

The **activity** should appear similar to this.



Drag the sentences into order to let the reader know how to change a lightbulb.

Switch on the power.

^

v

Allow the lightbulb to cool.

^

v

Remove the old bulb.

^

v

Turn off the power to the light bulb.

^

v

Dispose of the old bulb.

^

v

Insert the replacement bulb

^

v

